



Gearbox + Motor

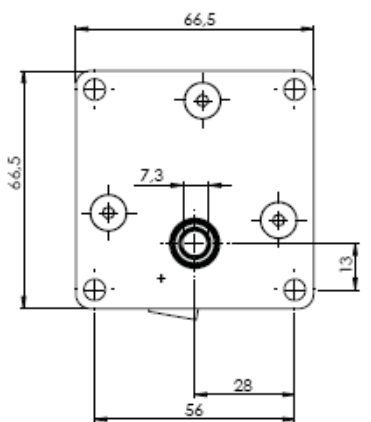

Note: Pole (+): left side, view output shaft.

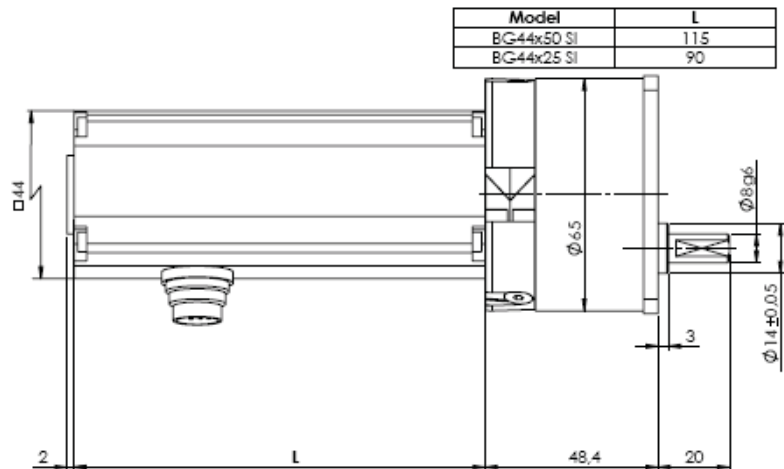

KT50

TECHNICAL CHARACTERISTICS

High endurance gearbox for heavy duty continuous workload in any position, at room temperature from -15 to 50°C, with **torque load up to 5 Nm, steady load.**

- **Box.** Made of die-cast Zamak with a tubular aluminium cover and aluminium frontal fixation flange.
- **Gear set.** Hobbed spur gear set with steel pinions and gear wheels, with case superficial heat anti-friction treatment. The intermediate gears turn on rectified hardened steel shafts, which are fixed to the box.
- **Output shaft.** Ø8 mm steel shaft, 20 mm usable length, with a flat. Incorporates and turns on ball bearings.
- **Output shaft load:**

Axial direction, pull or push	100 N ≈ 10 Kg.
Radial direction, at 10 mm from box	100 N ≈ 10 Kg.
- **Lubrication.** Lithium grade 2 grease.
- **Weight.** With maximal number of stages: 1.20 Kg.

MOTOR COUPLING:

- **Direct C.:** Dunker BG44 SI-24V.

■ **OPTIONAL:**

- Speed regulation with electronic controller.

Avoid impacts on the output shaft when assembling or disassembling parts on it, this could damage the gearbox.

Your special requests are welcome.

BRUSHLESS DC MOTORS MODEL: Dunker BG44								
			BG44x25 SI-24V			BG44x50 SI-24V		
Reduction ratio $i = X:1$	Stages	Torque factor	No load speed n_0 (r.p.m.)	Nominal Speed n_N (r.p.m.)	Nominal Torque (N.m)	No load speed n_0 (r.p.m.)	Nominal Speed n_N (r.p.m.)	Nominal Torque (N.m)
1,44	1	1,30	3256,94	1986,11	0,07	3354,17	2388,89	0,13
2,17	1	1,95	2161,29	1317,97	0,11	2225,81	1585,25	0,20
3,46	2	2,80	1355,49	826,59	0,16	1395,95	994,22	0,29
4,79	2	3,88	979,12	597,08	0,22	1008,35	718,16	0,40
9,28	2	7,52	505,39	308,19	0,43	520,47	370,69	0,77
12,88	2	10,43	364,13	222,05	0,59	375,00	267,08	1,06
15,07	3	10,99	311,21	189,78	0,63	320,50	228,27	1,12
19,54	3	14,24	240,02	146,37	0,81	247,19	176,05	1,45
29,19	3	21,28	160,67	97,98	1,21	165,47	117,85	2,17
40,49	3	29,52	115,83	70,63	1,68	119,29	84,96	3,01

NO LOAD SPEED/NOMINAL TORQUE

Motor BG 44x25 SI-24V= 4690 r.p.m./0,196Nm.

Motor BG 44x50 SI-24V= 4830 r.p.m./0,484Nm.

WARNING: The load might reduce final speed up to 40%.**GEARBOX TIPS:**

Noise: noise level depends on load symmetry, location (avoid acoustic resonance), and rotation speed; the lower the speed on the input shaft (motor), the lower the noise.